

PINOUT CONFIGURATION


HD 44 1/4TRS PRINT
 MALE FEMALE

RED MOLD

43	GREEN	TIP	IN 1
44	GREEN	RING	IN 1
42	SHIELD	SLEEVE	
14	GREEN	TIP	IN 2
15	GREEN	RING	IN 2
30	SHIELD	SLEEVE	
13	GREEN	TIP	IN 3
29	GREEN	RING	IN 3
30	SHIELD	SLEEVE	
12	GREEN	TIP	IN 4
28	GREEN	RING	IN 4
42	SHIELD	SLEEVE	
11	GREEN	TIP	IN 5
27	GREEN	RING	IN 5
41	SHIELD	SLEEVE	
10	GREEN	TIP	IN 6
26	GREEN	RING	IN 6
40	SHIELD	SLEEVE	
9	GREEN	TIP	IN 7
25	GREEN	RING	IN 7
39	SHIELD	SLEEVE	
8	GREEN	TIP	IN 8
24	GREEN	RING	IN 8
38	SHIELD	SLEEVE	

BLACK MOLD

7	GREEN	TIP	OUT 1
23	GREEN	RING	OUT 1
37	SHIELD	SLEEVE	
6	GREEN	TIP	OUT 2
22	GREEN	RING	OUT 2
36	SHIELD	SLEEVE	
5	GREEN	TIP	OUT 3
21	GREEN	RING	OUT 3
35	SHIELD	SLEEVE	
4	GREEN	TIP	OUT 4
20	GREEN	RING	OUT 4
34	SHIELD	SLEEVE	
3	GREEN	TIP	OUT 5
19	GREEN	RING	OUT 5
33	SHIELD	SLEEVE	
2	GREEN	TIP	OUT 6
18	GREEN	RING	OUT 6
33	SHIELD	SLEEVE	
1	GREEN	TIP	OUT 7
17	GREEN	RING	OUT 7
32	SHIELD	SLEEVE	
16	GREEN	TIP	OUT 8
31	GREEN	RING	OUT 8
32	SHIELD	SLEEVE	

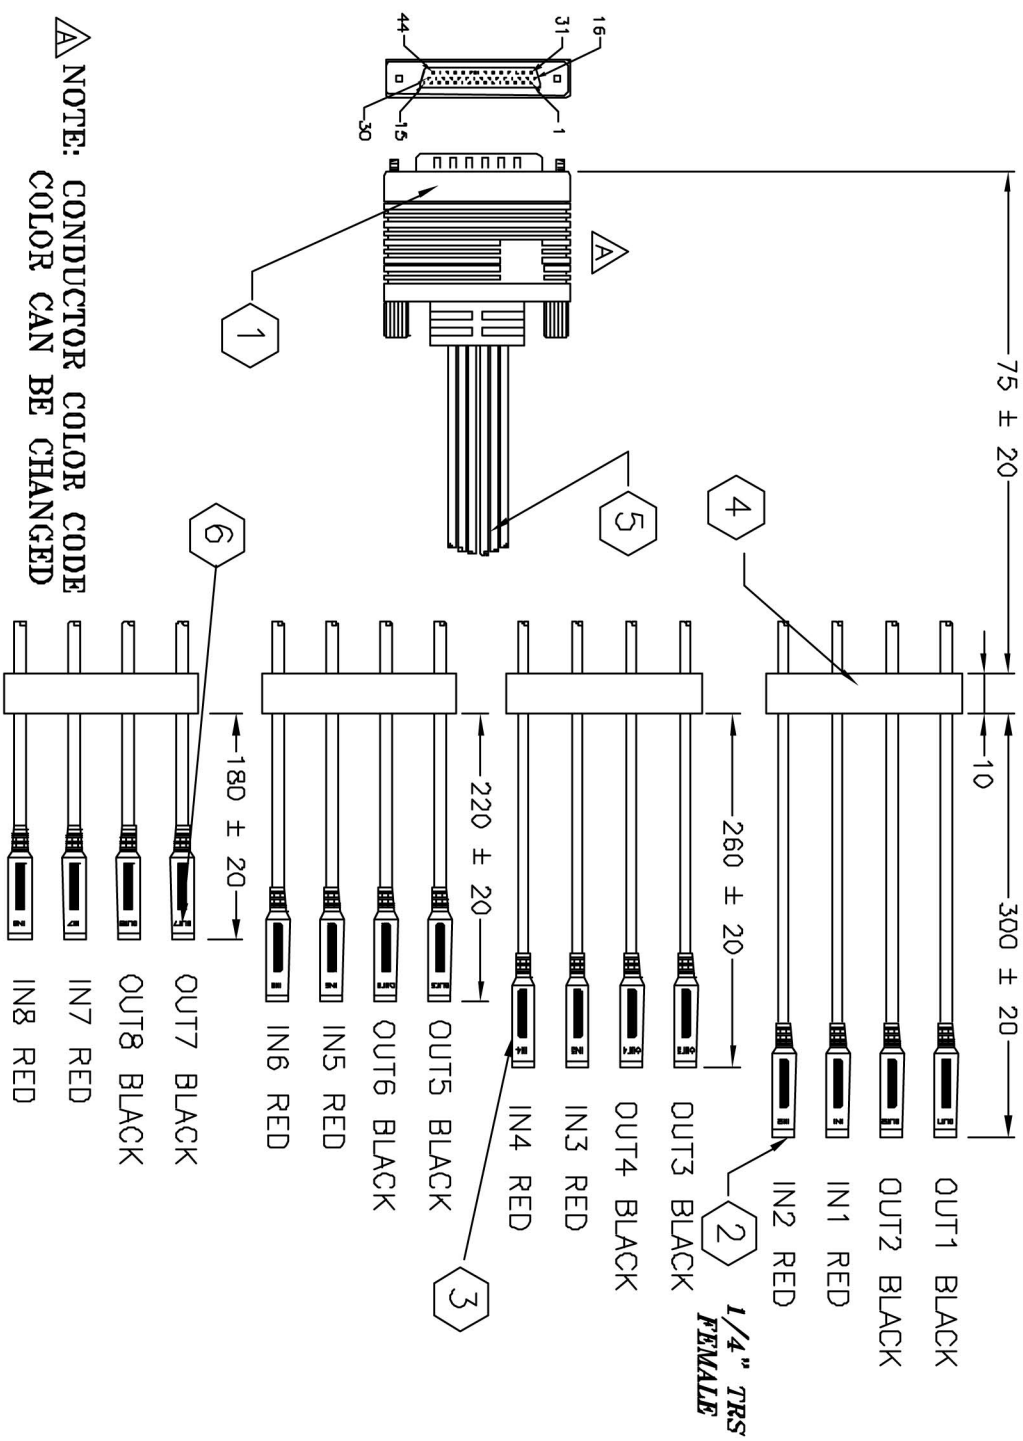

**NOTE: CONDUCTOR COLOR CODE
 COLOR CAN BE CHANGED**



PAD PRINT DETAIL

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HD44 MALE CONNECTOR, BLACK MOLDED PVC HOOD	1	PCS
2	1/4 IN(6.3mm) TRS FEMALE CONNECTOR	16	PCS
3	BLACK PVC MOLDED HOOD*8 AND RED PVC MOLDED HOOD*8	16	PCS
4	BLACK HEAT SHRINK TUBING	4	PCS
5	(28 AWG*1P4AE SHIELD, BLACK PVC JACKET O.D.=3.5mm)*16	SEE DWG.	
6	PAD PRINT WHITE LETTLERS	16	PCS